

# EURO-SEEDER T170 CE



EURO-SEEDER T170  
CE


**PRODUCT DESCRIPTION**  
FINN - the inventor of the Hydroseeder - is the world leader for over 80 years now in manufacturing these specialized machines that provide those Businesses anxious to intervene in the hydroseeding and hydromulching sector with power, efficiency and professionalism with the right equipment.

In order to choose the machine that's right for you and to learn more about this fascinating business, please visit the 'European Hydroseeding Guide' (currently only available in French) on our site [www.euro-tec.fr](http://www.euro-tec.fr)

## SPECIFICATIONS & PERFORMANCE

Tank Capacity	6 600 litre
Engine	CUMMINS QSF 2.8 Diesel Tier 4F, 65cv (48 kW)
Mixing system	Mechanical Agitation with paddles, hydraulically powered, reversible, variable speed
Pump	FINN Centrifugal pump, 4" x 2" (10.2 cm x 5 cm), 320 GPM@115 psi (1 210 lpm @ 792 kPA), adjustable
Weight	3 070 Kg empty / 11 000 Kg loaded
Dimensions	503 cm length, 234 cm width, 251 cm height
Available Options	<ul style="list-style-type: none"> <li>- Hydraulic hose reel with 60 lm 1 ¼ " hose mounted on 3 Position Pivoting Cradle</li> <li>- Extra set of Ground Level Controls</li> <li>- Volumetric pump (replaces centrifugal pump)</li> <li>- RAL paint to match your company colour</li> </ul>
Spraying Distance	60 metres from canon
Tank empty time	6 minutes with the canon
Mixing capacity	2 300 Kg granular (fertilizer) / 340 Kg Fibre Material (Mulch)
Daily Production Capacity	42 000 m <sup>2</sup> Hydroseeding / 9 500 m <sup>2</sup> Hydromulching

## TECHNICAL ASSISTANCE / AFTER SALES SERVICE

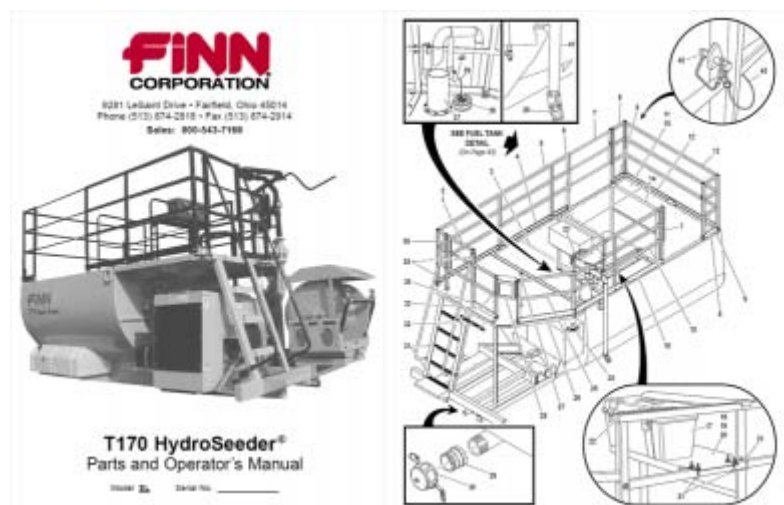

The User Manual with its exploded machine and parts view allows for optimum and quick reaction whenever needed, making use of an important spare part stock FINN Europe based in the Lyon (France) area. A technician on the hot-line can thus identify the issue, send spare parts or decide on eventual on-site support and repair.

## CE COMPLIANCE

This Equipment complies to the current European regulations and is delivered with its CE Certificate and Compliance Plate.