EURO-SEEDER T280 CE



EURO-SEEDER T280 CF


PRODUCT DESCRIPTION
FINN - the inventor of the
Hydroseeder -is the world
leader for over 80 years now in
manufacturing these
specialized machines that
provide those Business
Professionals anxious to
intervene in the hydroseeding
and hydromulching sector with
power, efficiency and
professionalism with the right
equipment.

In order to choose the machine that's right for you and to learn more about this fascinating business, please visit the 'European Hydroseeding Guide' (currently only available in French) on our site www.euro-tec.fr

SPECIFICATIONS & PERFORMANCE

Tank Capacity	10 500 litre
Engine	John DEERE 4045T Turbo Diesel Tier III, 125 HP
Mixing system	Double Agitator, Mechanical Agitation with paddles, hydraulically powered, reversible, variable speed
Pump	FINN Centrifugal pump, 5" x 2 ½ " (12.7 cm x 6.4 cm), 400 GPM@130 psi (1 514 lpm @ 896 kPA), adjustable
Weight	4 100 Kg empty / 16 000 Kg loaded
Dimensions	557 cm length, 231 cm width, 247 cm height
Available Options	 Hydraulic hose reel with 60 lm 1 ¼ " hose mounted on 3 Position Pivoting Cradle Extra set of Ground Level Controls Volumetric pump (in addition to centrifugal pump) RAL paint to match your company colour
Spraying Distance	70 metres from canon
Tank empty time	8 minutes with the canon
Mixing capacity	3 650 Kg granular (fertilizer) / 570 Kg Fibre Material (Mulch)
Daily Production Capacity	60 000 m² Hydroseeding / 16 000 m² Hydromulching

TECHNICAL ASSISTANCE / AFTER SALES SERVICE

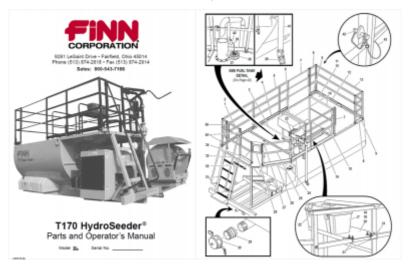

The User Manual with its exploded machine and parts view allows for optimum and quick reaction whenever needed, making use of an important spare part stock FINN Europe based in the Lyon (France) area. A technician on the hot-line can thus identify the issue, send spare parts or decide on eventual onsite support and repair.

CE COMPLIANCE

This Equipment complies to the current European regulations and is delivered with its CE Certificate and Compliance Plate.